


ETT  LIGHTING

# Magnetic track lighting system

NEW 2022

|| ETT LIGHTING

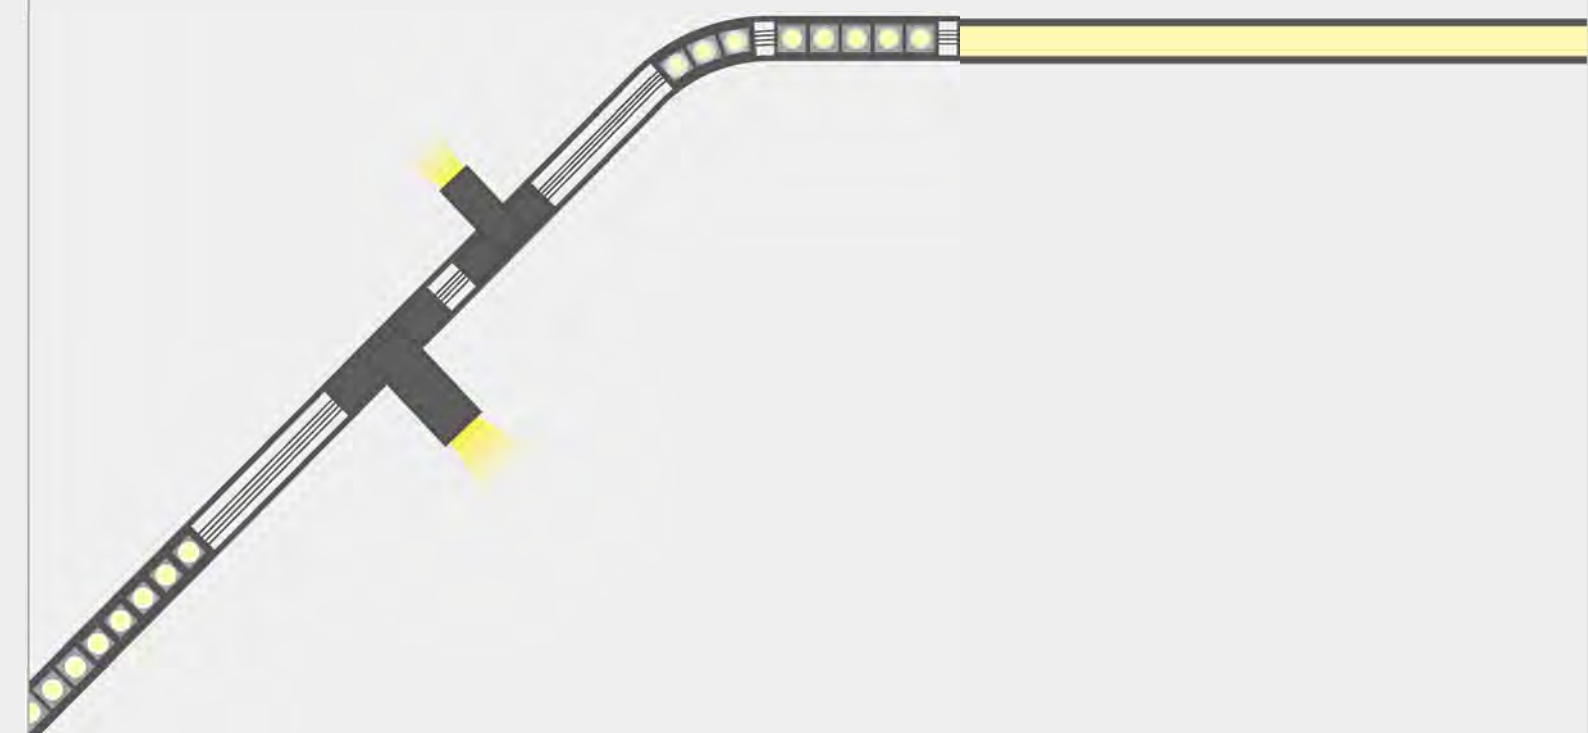

ETT  LIGHTING

ETT Lighting d.o.o.  
Dobrna 7  
3204 Dobrna  
Slovenia  
Tel: +386 (0)3 780 10 70  
Email: [info@ett-lighting.com](mailto:info@ett-lighting.com)  
[www.ett-lighting.com](http://www.ett-lighting.com)



# Contents

**STANDARD** ----- **11-26**

Track	5-14
Accessories	15
Dot	16-17
Linear	18-20
Fold	21-24
Wall washer	25
Out	26

**ADAPTERS** ----- **27-54**

Spot	29-37
Zoom	38
Halo	39-44
Pendant	45-53
Global	54

**MINI** ----- **55-66**

Track	55-59
Dot	60-61
Linear	62-64
Fold	65-66
Out	67
wallwasher	68

**STANDARD CURVY** ----- **69-74**


Track	71-72
Dot	73
Linear	74

**MINI CURVY** ----- **75-78**

Track	75-76
Dot	77
Linear	78

## Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

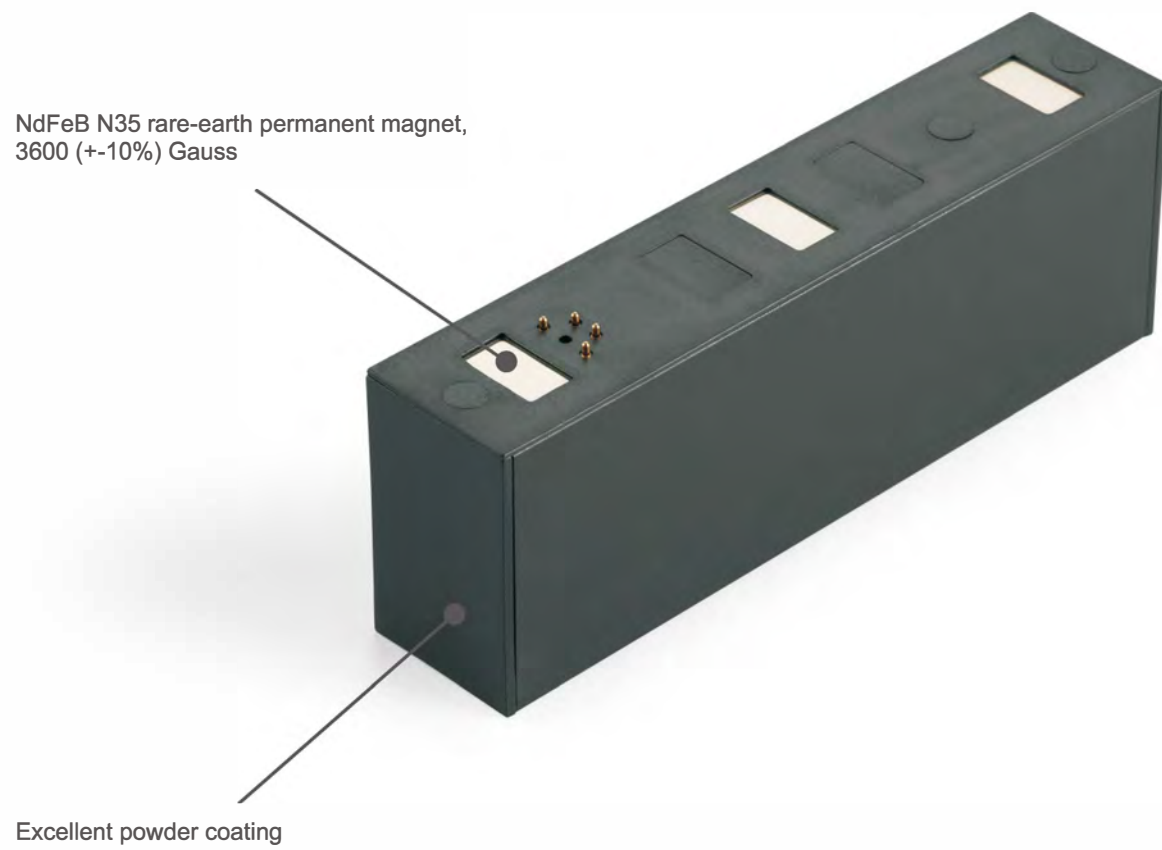


## Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

## Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

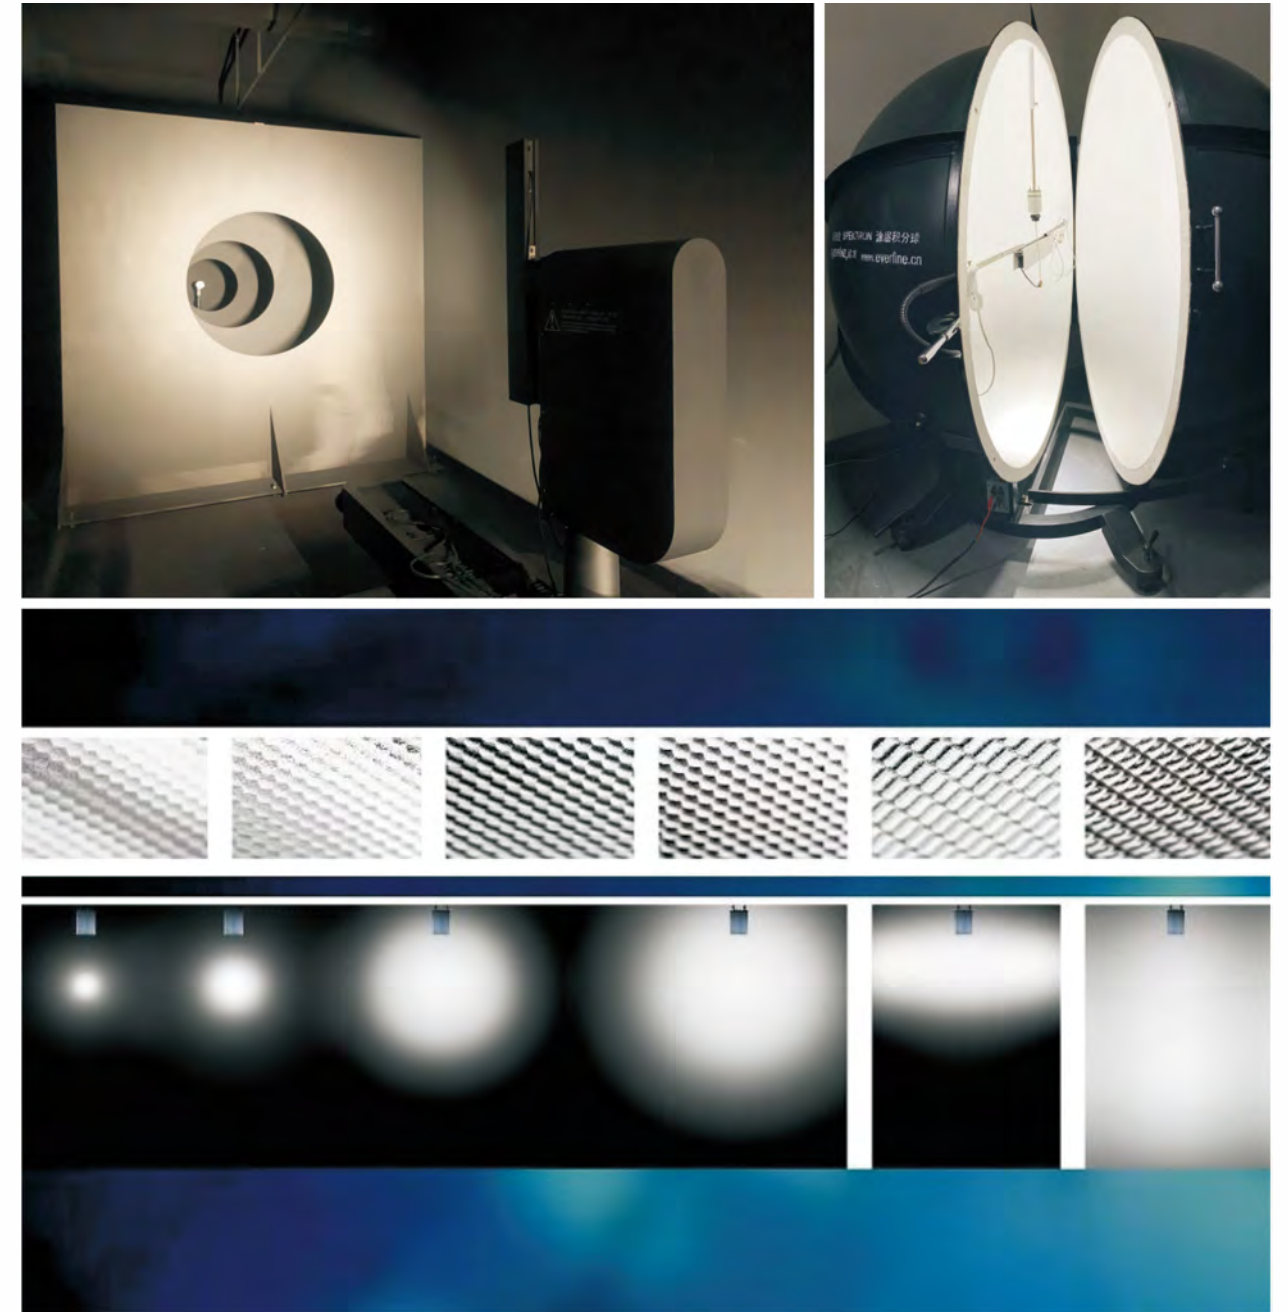



Thanks to the convenient structure our systems are used in various spaces from commercial to residential settings.

## TWO DESIGNS


Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.




**39mm**



**27.5mm**

Two input voltages:

**DC24V / DC48V**

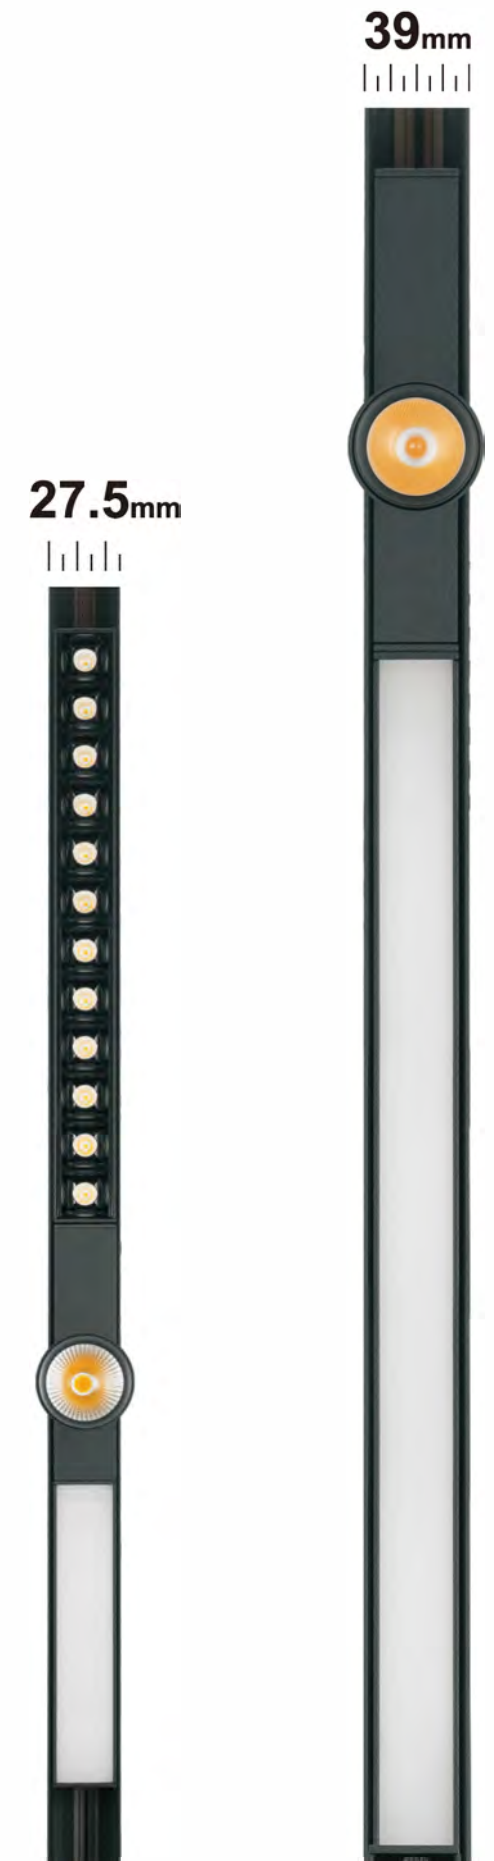






Various Installations:

**surface/recessed/pendant**

- Black
- White
- Golden
- Black bronze




## Seamless connection

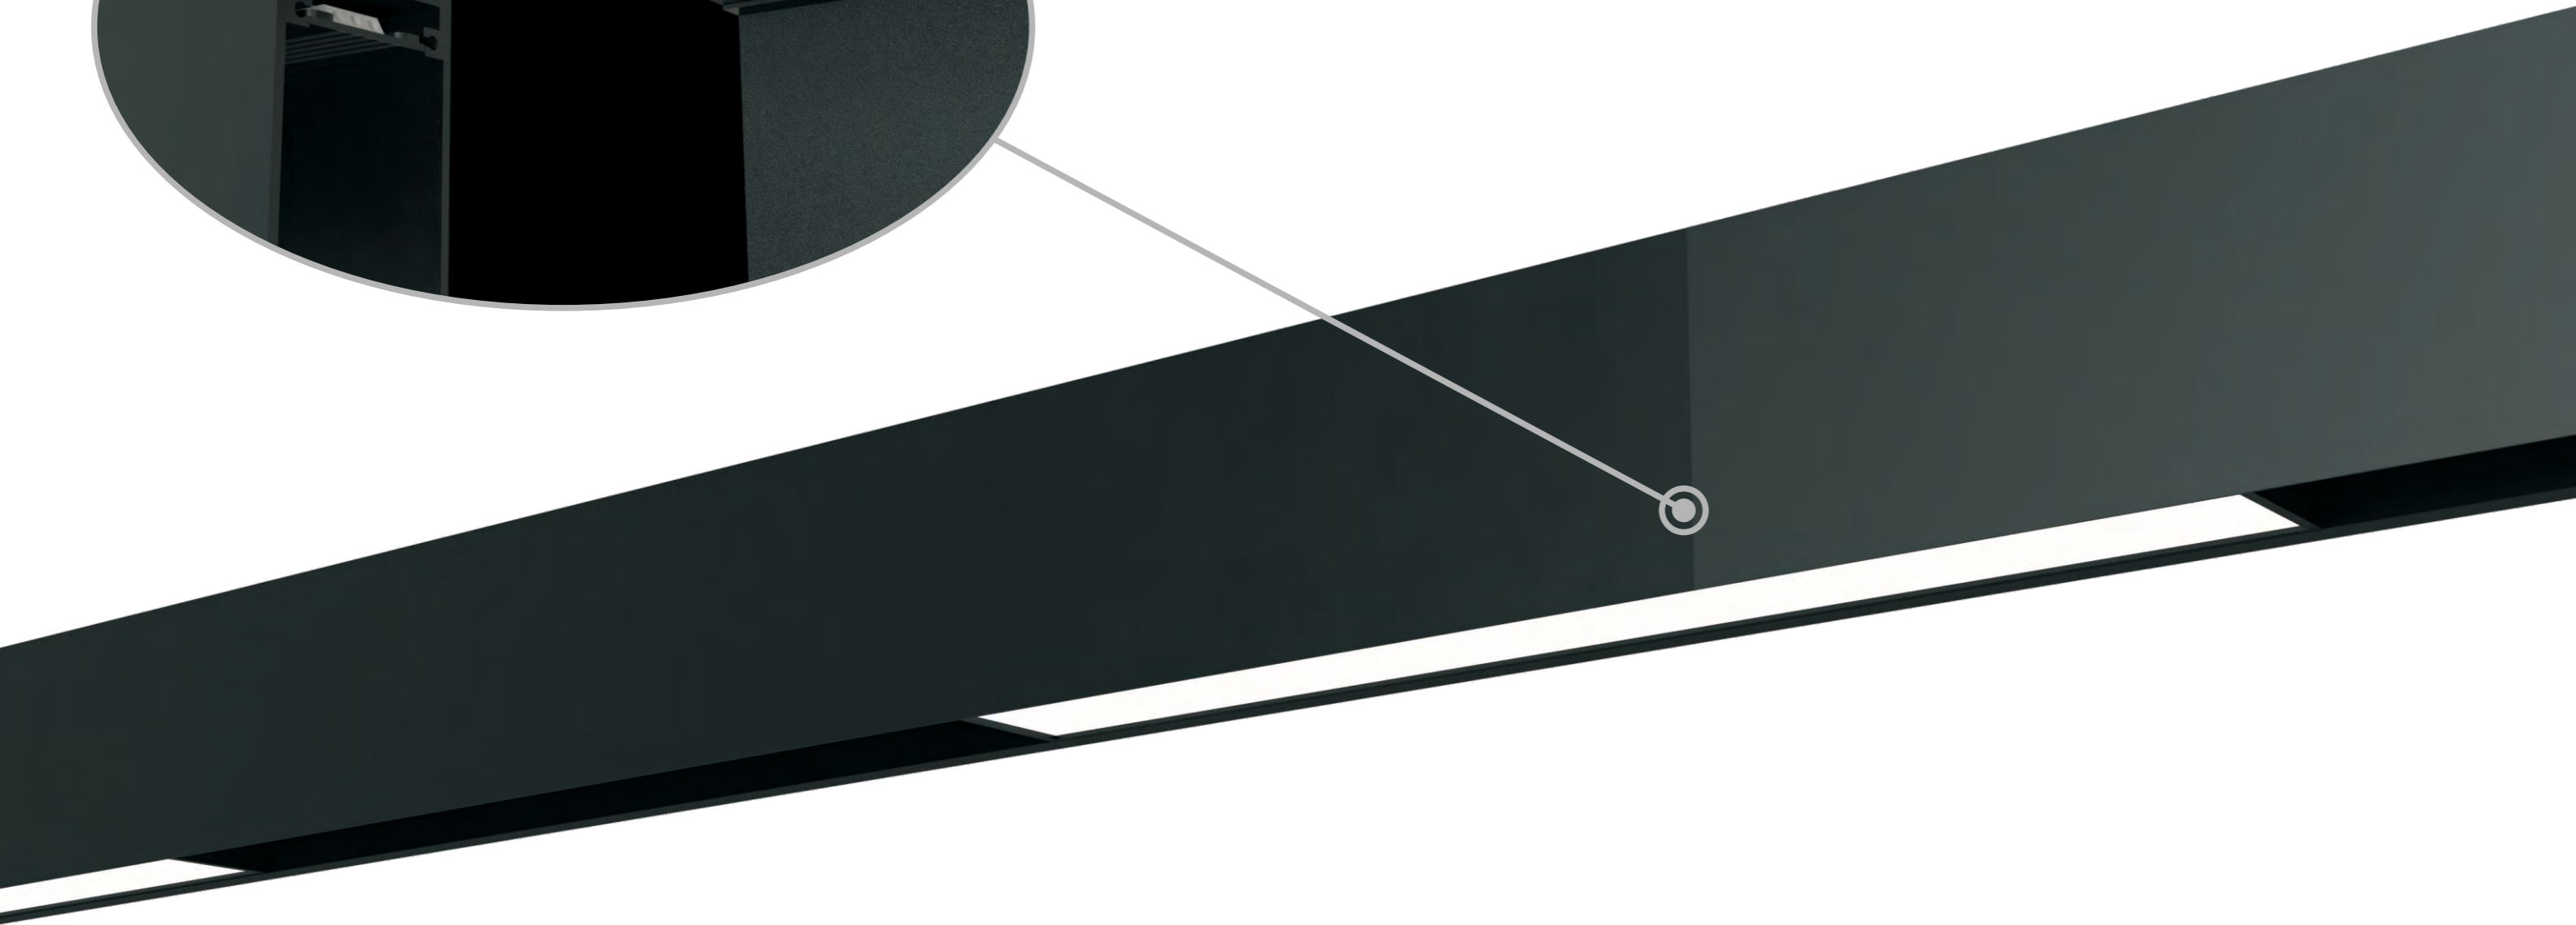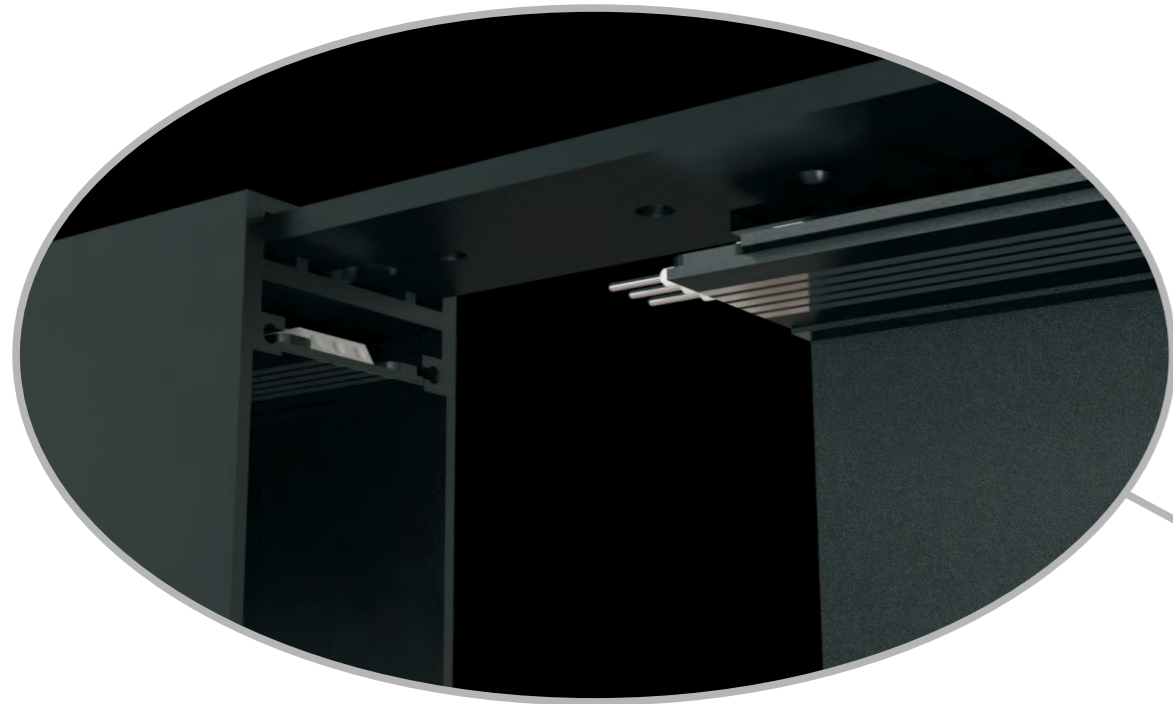

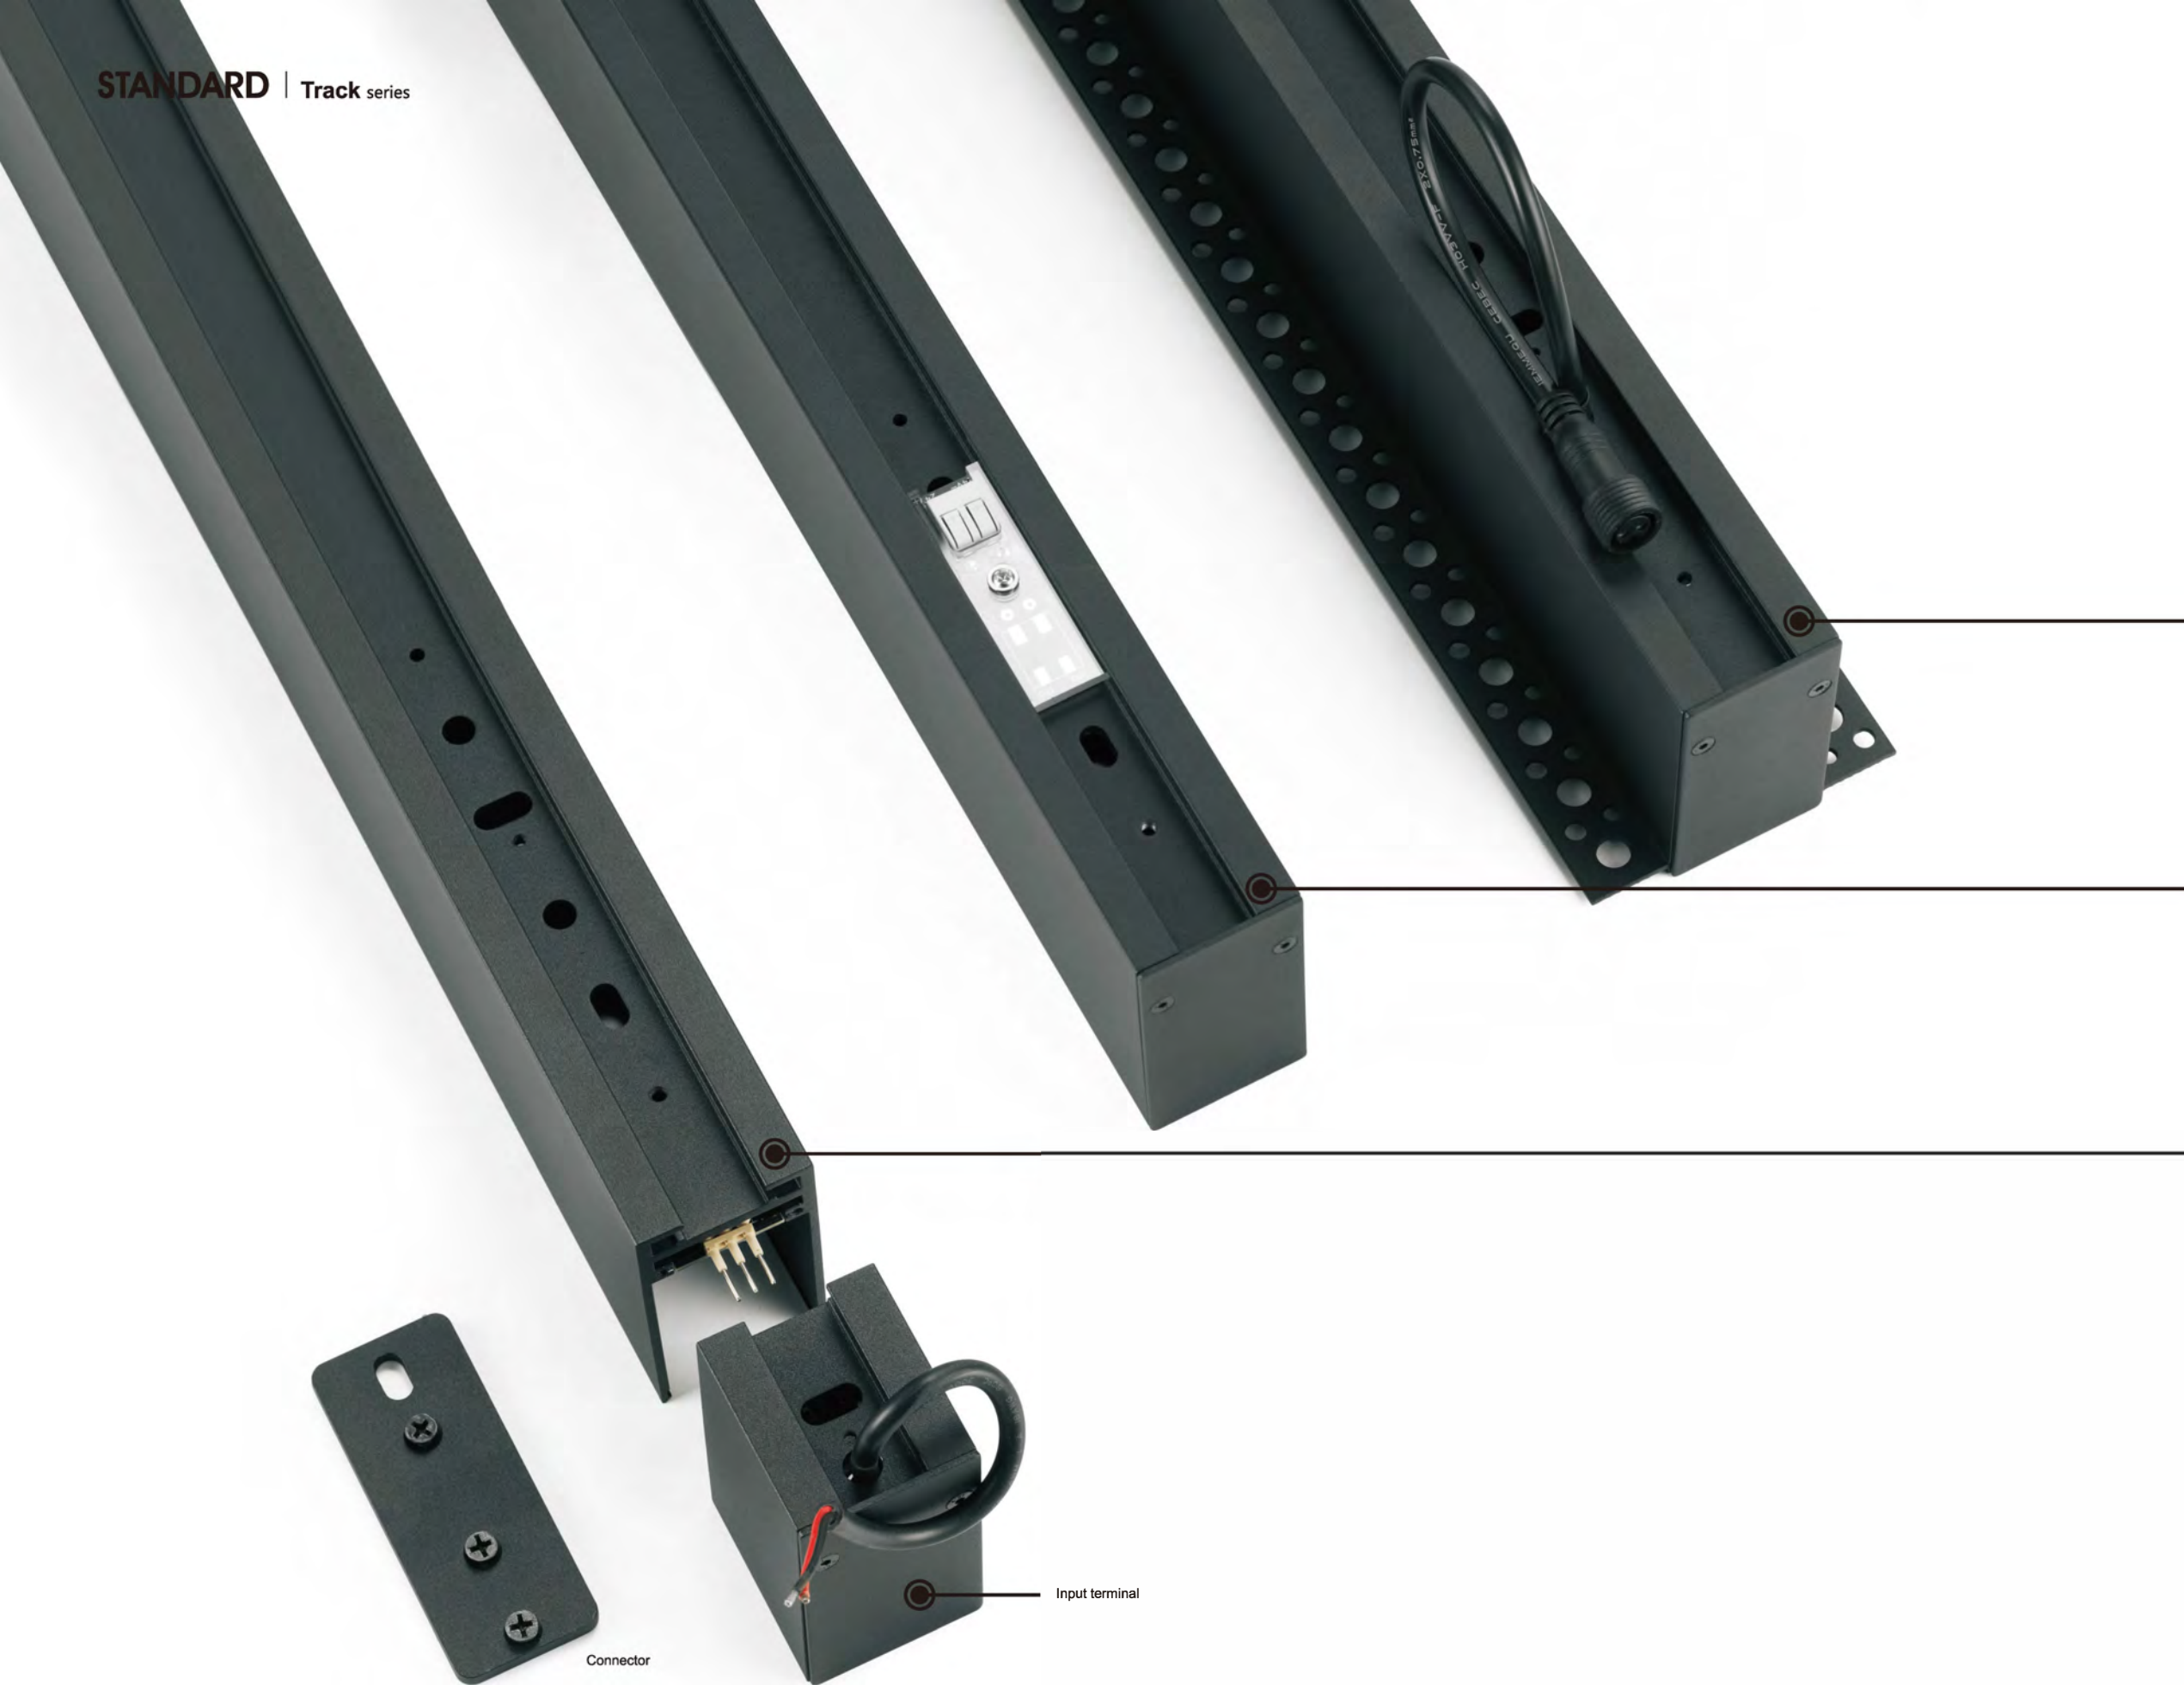

# STANDARD

series



Connector




Input terminal






Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black
  Sandy White
  Golden
  Black bronze

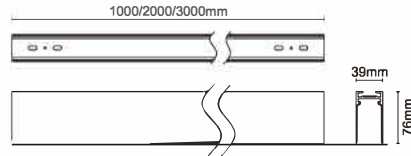

Model	Power	Install	Length
1 Meter profile-R	200W max	Recessed	1000mm
2 Meter profile-R	200W max	Recessed	2000mm
3 Meter profile-R	200W max	Recessed	3000mm


Sandy Black
  Sandy White



## CORNER


### L Corner

Sandy Black
  Sandy White




### Inner Corner

Sandy Black
  Sandy White




### Outer Corner

Sandy Black
  Sandy White



### T corner

Sandy Black
  Sandy White




### 45D corner

Sandy Black
  Sandy White



### CROSS corner


Sandy Black
  Sandy White



## CORNER

### L Corner-R

Sandy Black
  Sandy White




### Inner Corner-R

Sandy Black
  Sandy White




### Outer Corner-R

Sandy Black
  Sandy White



### T Corner-R


Sandy Black
  Sandy White



## POWER FEED

### Input terminal


Sandy Black
  Sandy White



## POWER FEED


### Input terminal-R

Sandy Black
  Sandy White




ACCESSORIES

Pendant kit-A

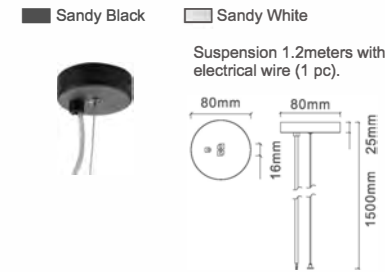

Pendant kit-B

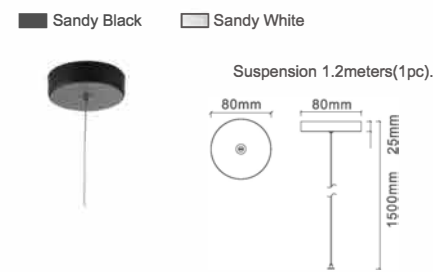


Pendant kit-C



Track connector



Power plate 65mm

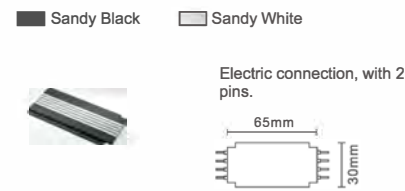


Pin



Track cover




Track driver box

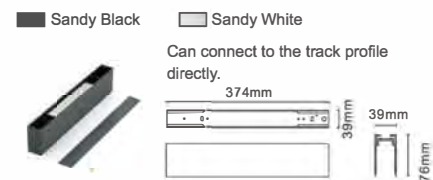

Driver box




End cap

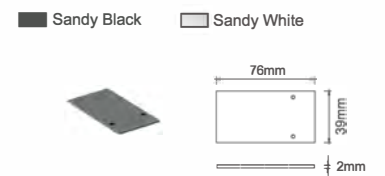

New surface mounted kits



Recessed kit

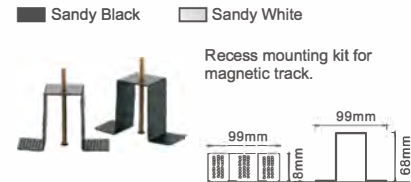



DOT01



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	126Lm



LIGHT DISTRIBUTION  
3000K 90Ra

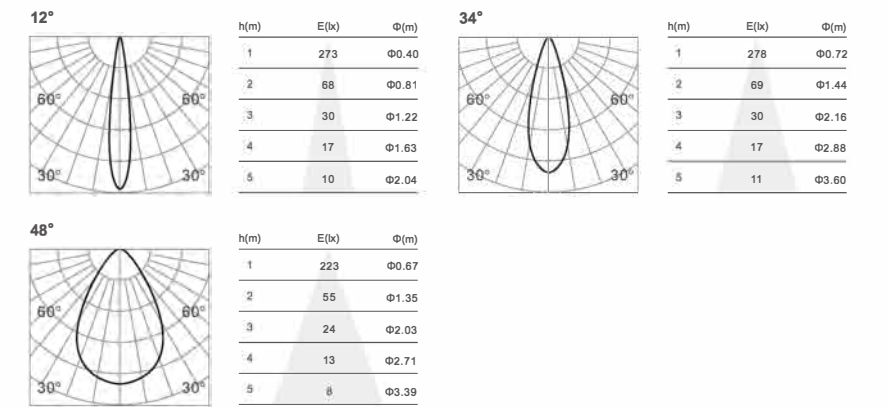



DOT03



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	382Lm



LIGHT DISTRIBUTION  
3000K 90Ra

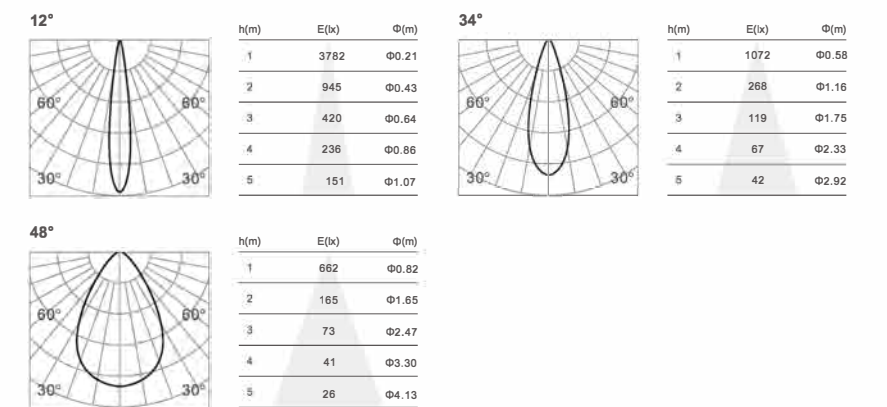



**DOT06**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	5723	Φ0.21
2	1431	Φ0.42
3	635	Φ0.63
4	357	Φ0.84
5	228	Φ1.05



h(m)	E(lx)	Φ(m)
1	1807	Φ0.63
2	451	Φ1.26
3	200	Φ1.89
4	112	Φ2.52
5	72	Φ3.15



h(m)	E(lx)	Φ(m)
1	1287	Φ0.79
2	321	Φ1.58
3	143	Φ2.37
4	80	Φ3.16
5	51	Φ3.95



**DOT12**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95



**Linear08**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		



■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	88	Φ2.38
2	22	Φ4.77
3	9	Φ7.16
4	5	Φ9.55
5	3	Φ11.94



**Linear16**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30





### Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


#### LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35



### Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 90	< 3	3000K	Diffuse	2550Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


#### LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	962	Φ2.53
2	240	Φ5.06
3	107	Φ7.60
4	60	Φ10.13
5	38	Φ12.66



### Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 90	< 3	3000K	Diffuse	1720Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


#### LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	661	Φ2.47
2	165	Φ4.94
3	73	Φ7.41
4	41	Φ9.88
5	26	Φ12.36





**Fold03**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>4W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>12°</b>	<b>382Lm</b>
	<b>&gt; 80</b>		<b>2700K</b>	<b>34°</b>	
			<b>4000K</b>	<b>48°</b>	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3782	Φ0.21
2	945	Φ0.43
3	420	Φ0.64
4	236	Φ0.86
5	151	Φ1.07



h(m)	E(lx)	Φ(m)
1	1072	Φ0.58
2	268	Φ1.16
3	119	Φ1.75
4	67	Φ2.33
5	42	Φ2.92



h(m)	E(lx)	Φ(m)
1	662	Φ0.82
2	165	Φ1.65
3	72	Φ2.47
4	41	Φ3.30
5	26	Φ4.13

**Fold06**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>8W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>12°</b>	<b>733Lm</b>
	<b>&gt; 80</b>		<b>2700K</b>	<b>34°</b>	
			<b>4000K</b>	<b>48°</b>	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5723	Φ0.21
2	1431	Φ0.42
3	635	Φ0.63
4	357	Φ0.84
5	228	Φ1.05



h(m)	E(lx)	Φ(m)
1	1807	Φ0.63
2	451	Φ1.26
3	200	Φ1.89
4	112	Φ2.52
5	72	Φ3.15



h(m)	E(lx)	Φ(m)
1	1287	Φ0.79
2	321	Φ1.58
3	143	Φ2.37
4	80	Φ3.16
5	51	Φ3.95



**Fold12**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>16W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>12°</b>	<b>1440LM</b>
	<b>&gt; 80</b>		<b>2700K</b>	<b>34°</b>	
			<b>4000K</b>	<b>48°</b>	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95




### Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



#### LIGHT DISTRIBUTION

3000K 90Ra

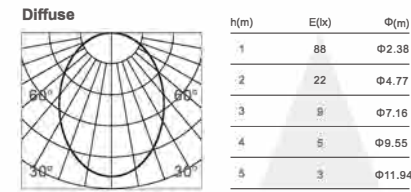


### Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	1270Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



#### LIGHT DISTRIBUTION

3000K 90Ra

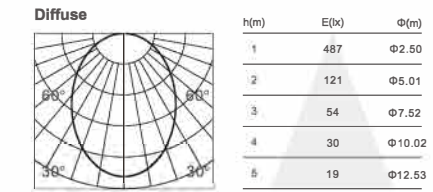


### Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



#### LIGHT DISTRIBUTION

3000K 90Ra

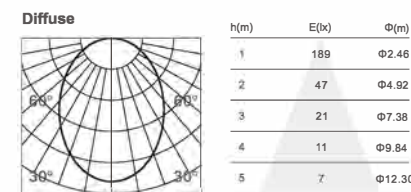



### Washer13





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	wallwasher	480Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION

3000K 90Ra

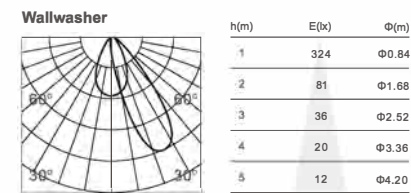

### Out32





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION

3000K 90Ra

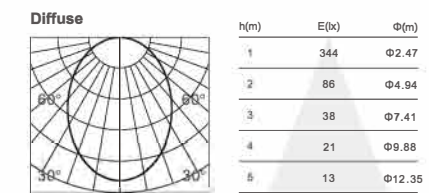

### Washer27





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	wallwasher	1055Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION

3000K 90Ra

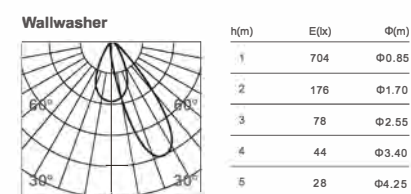

### Out12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1435Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION


3000K 90Ra

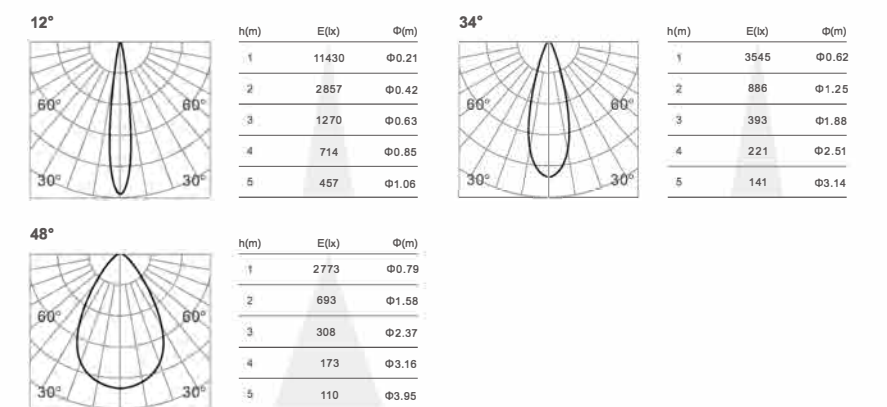

**ADAPTERS**

# 4 Adapters

Same spotlight heads + 4 kinds of adapters = 4 different system

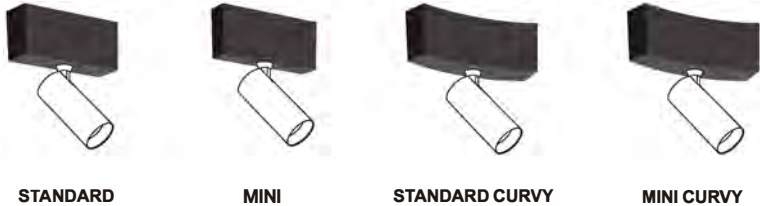

Spot



Pendant



STANDARD      MINI      STANDARD CURVY      MINI CURVY





**Spot35**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	


■ Sandy Black    □ Sandy White    ■ Golden

**LIGHT DISTRIBUTION**


3000K 90Ra

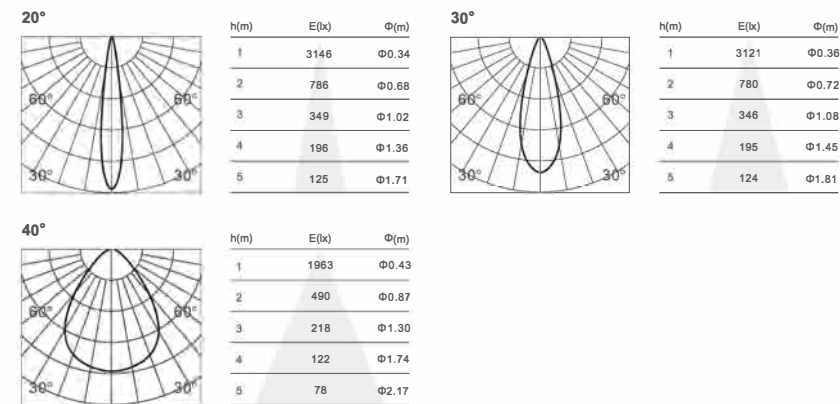


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**



**Spot35-T**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	


■ Sandy Black    □ Sandy White    ■ Golden

**LIGHT DISTRIBUTION**


3000K 90Ra

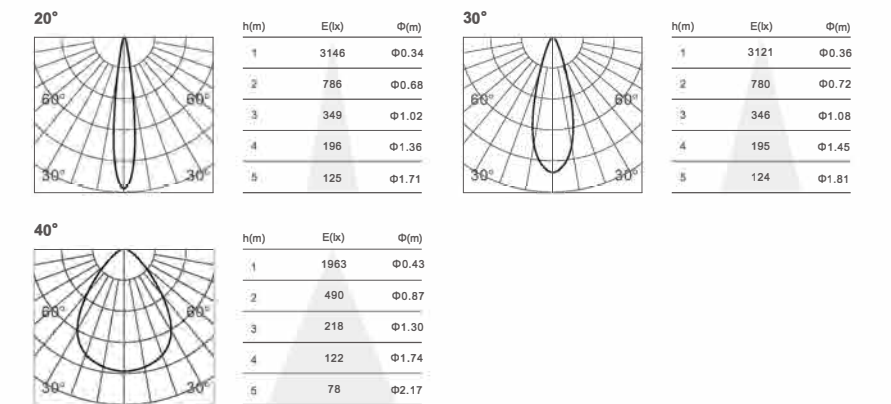


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**





### Spot65-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	10°	251Lm
	> 80		2700K	20°	
			4000K	30°	


■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION


3000K 90Ra

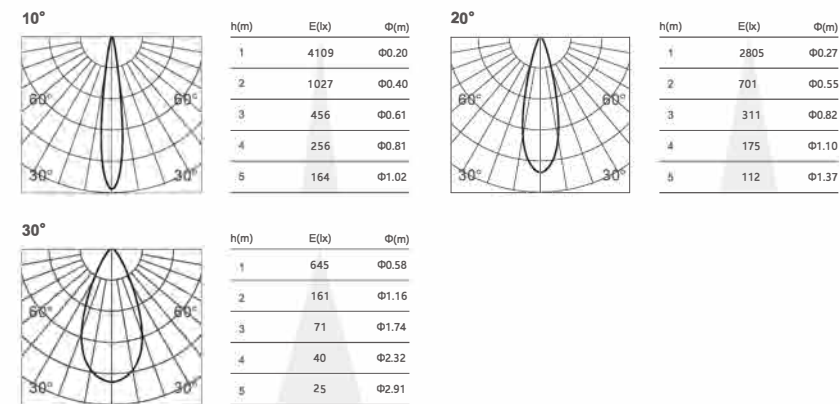


#### STANDARD




#### MINI



#### STANDARD CURVY



#### MINI CURVY



### Spot92-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	10°	481Lm
	> 80		2700K	20°	
			4000K	30°	


■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION


3000K 90Ra

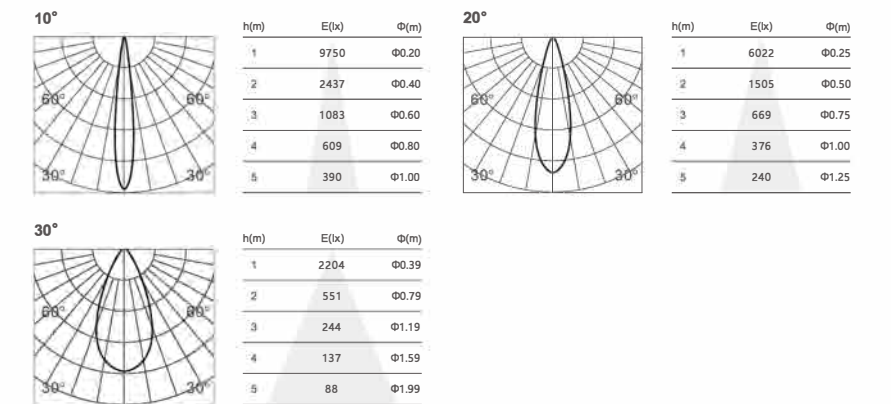


#### STANDARD




#### MINI



#### STANDARD CURVY



#### MINI CURVY





**Spot50**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	682Lm
	> 80		2700K	24°	
			4000K	36°	

■ Sandy Black    □ Sandy White    ■ Golden

**LIGHT DISTRIBUTION**


3000K 90Ra

18°




h(m)	E(lx)	Φ(m)
1	4902	Φ0.32
2	1226	Φ0.65
3	544	Φ0.98
4	306	Φ1.31
5	196	Φ1.63

24°




h(m)	E(lx)	Φ(m)
1	4186	Φ0.39
2	1047	Φ0.79
3	465	Φ1.19
4	261	Φ1.58
5	167	Φ1.98

36°




h(m)	E(lx)	Φ(m)
1	2077	Φ0.64
2	519	Φ1.29
3	230	Φ1.94
4	129	Φ2.58
5	83	Φ3.23


**STANDARD**




**MINI**




**STANDARD CURVY**



**MINI CURVY**





**Spot35-SQ**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	15°	365Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra

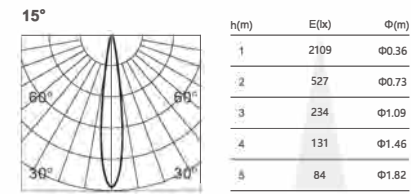


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**



**Spot50-SQ**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	688Lm
	> 80		2700K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra

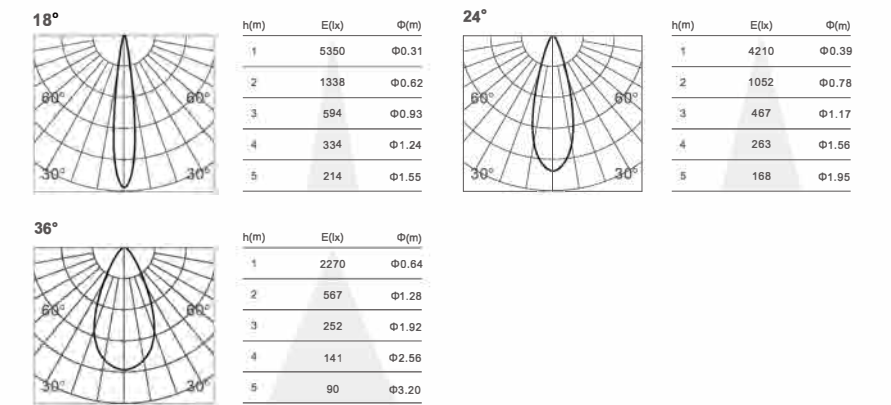


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**





Spot70




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 90	< 3	3000K	18°	1343Lm
	> 80		2700K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

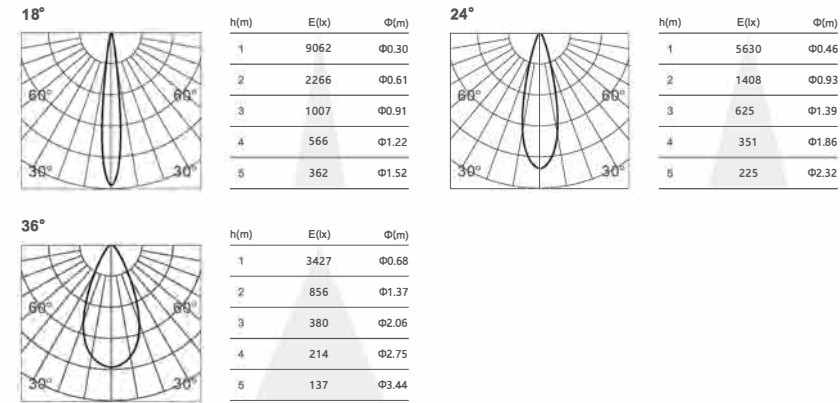


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Zoom55




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	20°-60°	800Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

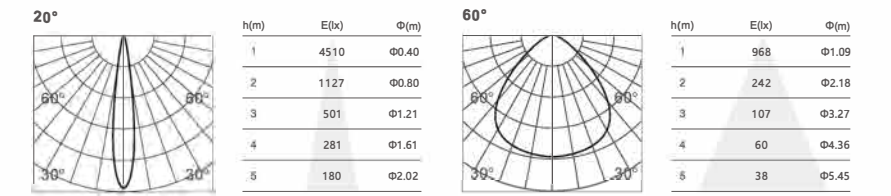


STANDARD




MINI




STANDARD CURVY




MINI CURVY






Angle adjustment

Halo spot

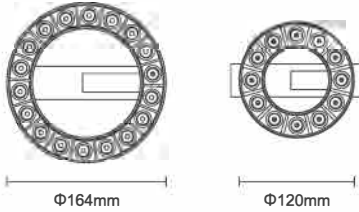

Halo linear

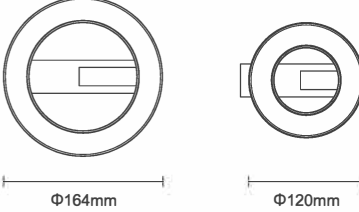



**Halo-D18**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	20°	1562Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra

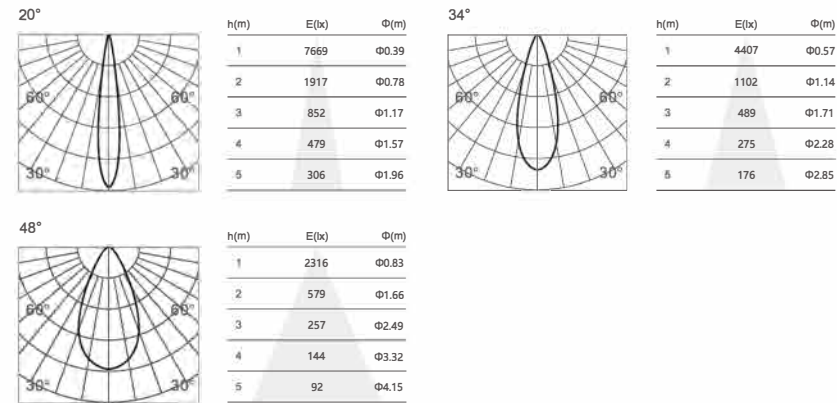


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**



**Halo-L16**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	Diffuse	686Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra

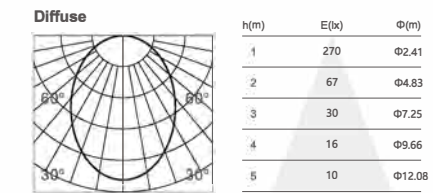


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**





### Halo-D12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	20°	950Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION


3000K 90Ra

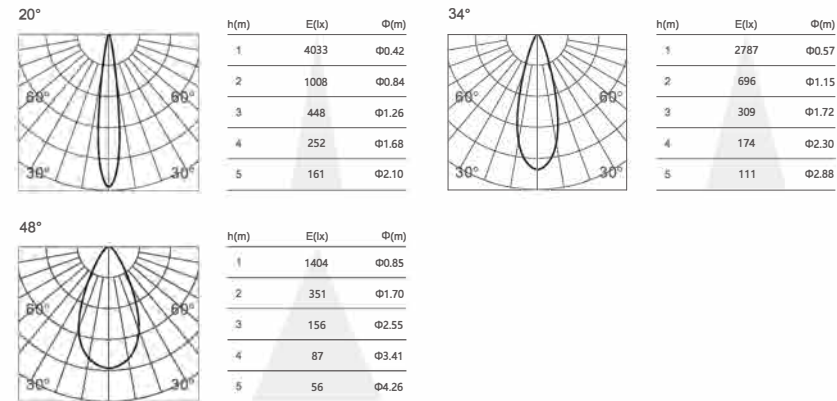


#### STANDARD




#### MINI



#### STANDARD CURVY



#### MINI CURVY



### Halo-L12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	470Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

#### LIGHT DISTRIBUTION


3000K 90Ra

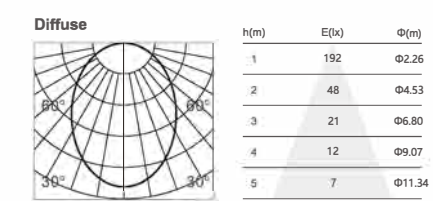


#### STANDARD




#### MINI



#### STANDARD CURVY



#### MINI CURVY









**Pendant35-R**






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	

■ Sandy Black    □ Sandy White    ■ Golden    ■ Black bronze

**LIGHT DISTRIBUTION**

3000K 90Ra

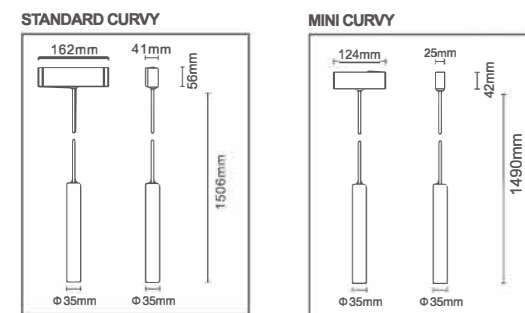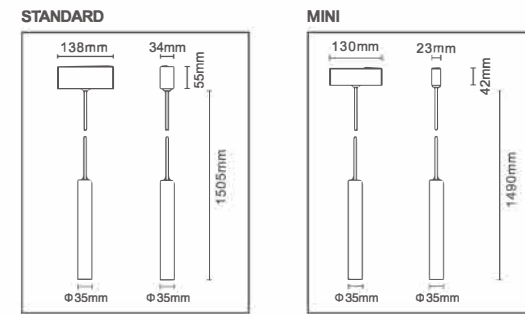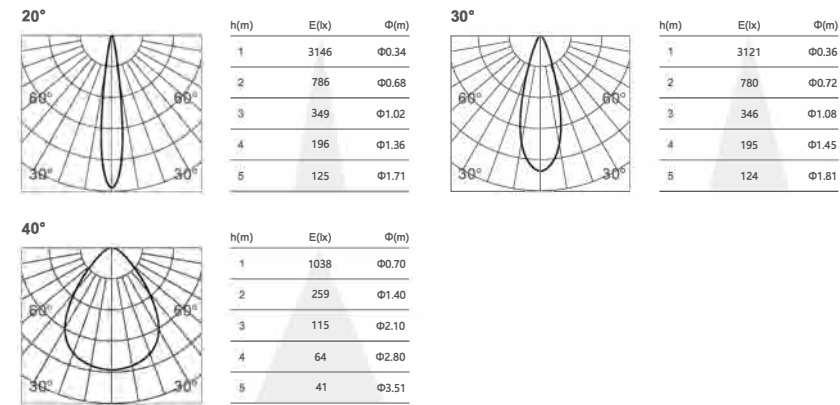

**Pendant50-R**






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	682Lm
	> 80		2700K	24°	
			4000K	36°	

■ Sandy Black    □ Sandy White    ■ Golden    ■ Black bronze

**LIGHT DISTRIBUTION**

3000K 90Ra

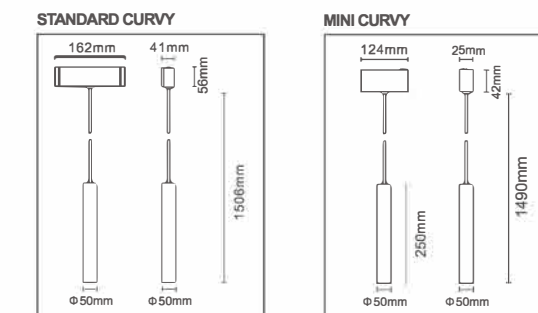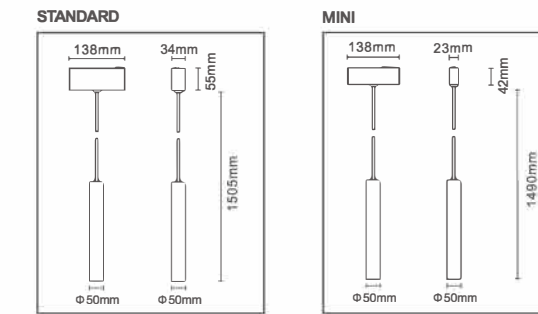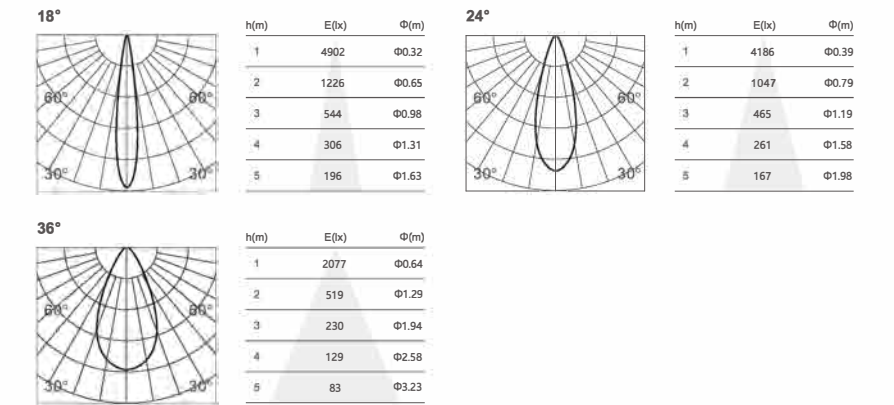



**Pendant35-R-A-10**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	460Lm
	> 80		2700K		
			4000K		

■ Sandy Black    □ Sandy White    ■ Golden    ■ Black bronze

**LIGHT DISTRIBUTION**


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	501	Φ0.43
2	125	Φ0.87
3	55	Φ1.30
4	31	Φ1.74
5	20	Φ2.17


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**



**Pendant35-R-A-20**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	460Lm
	> 80		2700K		
			4000K		

■ Sandy Black    □ Sandy White    ■ Golden    ■ Black bronze

**LIGHT DISTRIBUTION**


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	184	Φ0.49
2	46	Φ0.99
3	20	Φ1.49
4	11	Φ1.99
5	7	Φ2.48


**STANDARD**




**MINI**



**STANDARD CURVY**



**MINI CURVY**





Pendant-glory




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	264Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	333	Φ1.24
2	83	Φ2.48
3	37	Φ3.72
4	20	Φ4.96
5	13	Φ6.20


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Pendant-global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	346Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


2700K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	30	Φ2.00
2	7	Φ4.00
3	3	Φ6.00
4	1.9	Φ8.00
5	1.2	Φ10.00


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	346Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


2700K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	30	Φ2.00
2	7	Φ4.00
3	3	Φ6.00
4	1.9	Φ8.00
5	1.2	Φ10.00


STANDARD




MINI



STANDARD CURVY





MINI CURVY





# MINI


series

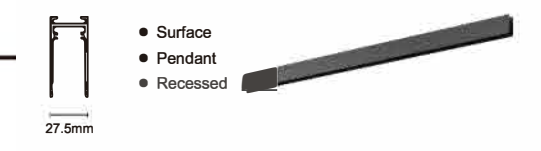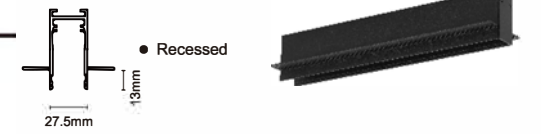




Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

■ Sandy Black    □ Sandy White    ■ Golden    ■ Black bronze

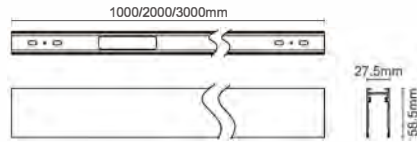

Model	Power	Install	Length
1 Meter profile-R-s	200W max	Recessed	1000mm
2 Meter profile-R-s	200W max	Recessed	2000mm
3 Meter profile-R-s	200W max	Recessed	3000mm


■ Sandy Black    □ Sandy White



CORNER


L corner-s

■ Sandy Black    □ Sandy White

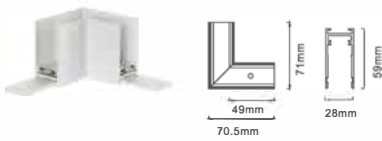


Inner corner-s

■ Sandy Black    □ Sandy White

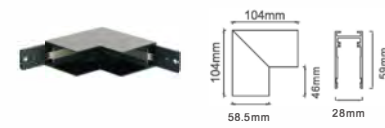


Outer corner-s

■ Sandy Black    □ Sandy White

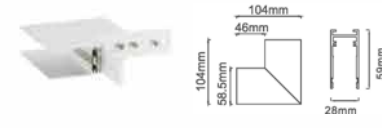

T corner-s

■ Sandy Black    □ Sandy White

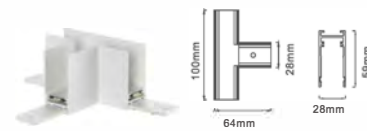

45D corner-s

■ Sandy Black    □ Sandy White



Cross corner-s


■ Sandy Black    □ Sandy White



CORNER


L corner-R-s

■ Sandy Black    □ Sandy White

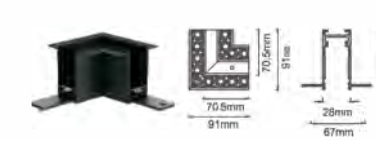


Inner corner-R-s

■ Sandy Black    □ Sandy White

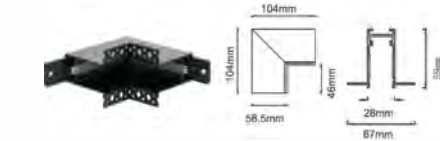


Outer corner-R-s

■ Sandy Black    □ Sandy White

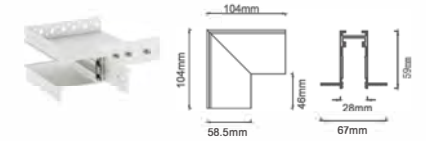

T corner-R-s


■ Sandy Black    □ Sandy White

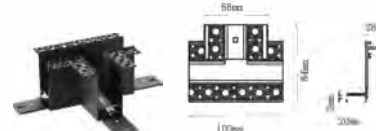



Model	Power	Install	Length
1 Meter profile-M-s	200W max	Recessed	1000mm
2 Meter profile-M-s	200W max	Recessed	2000mm
3 Meter profile-M-s	200W max	Recessed	3000mm

■ Sandy Black □ Sandy White

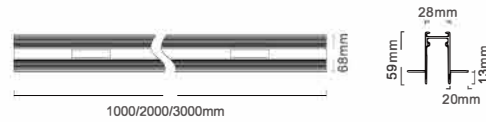

Dot06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 90 > 80	< 3	3000K 2700K 4000K	20° 34° 48°	510Lm


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(k)	Φ(m)
1	2563	Φ0.37
2	640	Φ0.74
3	284	Φ1.12
4	160	Φ1.49
5	102	Φ1.86



h(m)	E(k)	Φ(m)
1	1863	Φ0.43
2	465	Φ0.87
3	207	Φ1.31
4	116	Φ1.75
5	74	Φ2.19




h(m)	E(k)	Φ(m)
1	1139	Φ0.37
2	284	Φ0.74
3	126	Φ1.12
4	71	Φ1.49
5	45	Φ1.86



CORNER


L Corner-M-s

■ Sandy Black □ Sandy White

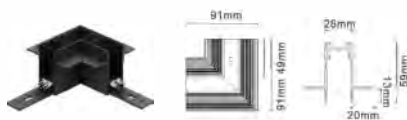


Inner Corner-M-s

■ Sandy Black □ Sandy White

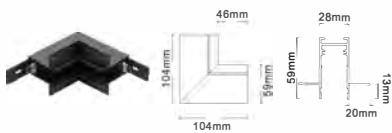

Outer Corner-M-s

■ Sandy Black □ Sandy White

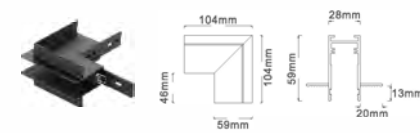

Dot12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	20° 34° 48°	1020Lm


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(k)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80



h(m)	E(k)	Φ(m)
1	3794	Φ0.36
2	948	Φ0.72
3	421	Φ1.08
4	237	Φ1.44
5	151	Φ1.80



h(m)	E(k)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29







**Dot24-s**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90	< 3	3000K	20°	1875Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	101121	Φ0.36
2	2528	Φ0.73
3	1124	Φ1.10
4	632	Φ1.47
5	404	Φ1.84



h(m)	E(lx)	Φ(m)
1	7111	Φ0.42
2	1778	Φ0.85
3	790	Φ1.28
4	444	Φ1.71
5	284	Φ2.14



h(m)	E(lx)	Φ(m)
1	4057	Φ0.65
2	1014	Φ1.30
3	450	Φ1.96
4	253	Φ2.61
5	162	Φ3.27



**Linear10-s**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	230Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	88	Φ2.37
2	22	Φ4.74
3	9	Φ7.12
4	5	Φ9.49
5	3	Φ11.86



**Linear20-s**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	605Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	239	Φ2.35
2	59	Φ4.70
3	26	Φ7.05
4	14	Φ9.40
5	9	Φ11.75



### Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	Diffuse	1015Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


#### LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38



### Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 90	< 3	3000K	Diffuse	1970Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


#### LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	773	Φ2.42
2	193	Φ4.85
3	85	Φ7.27
4	48	Φ9.70
5	30	Φ12.12






### Fold06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	20°	685Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White




#### LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3457	Φ0.36
2	864	Φ0.72
3	384	Φ1.08
4	216	Φ1.45
5	138	Φ1.81



h(m)	E(lx)	Φ(m)
1	2622	Φ0.42
2	655	Φ0.85
3	291	Φ1.28
4	163	Φ1.71
5	104	Φ2.14



h(m)	E(lx)	Φ(m)
1	1490	Φ0.66
2	372	Φ1.33
3	165	Φ1.99
4	93	Φ2.66
5	59	Φ3.32




### Fold10-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	625Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



#### LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	167	Φ2.42
2	41	Φ4.84
3	18	Φ7.26
4	10	Φ9.68
5	8	Φ12.10




### Fold12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	20°	1150Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White




#### LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5895	Φ0.36
2	1474	Φ0.73
3	655	Φ1.09
4	368	Φ1.46
5	235	Φ1.82



h(m)	E(lx)	Φ(m)
1	4222	Φ0.43
2	1056	Φ0.87
3	469	Φ1.31
4	263	Φ1.74
5	168	Φ2.18



h(m)	E(lx)	Φ(m)
1	2303	Φ0.69
2	575	Φ1.38
3	255	Φ2.07
4	143	Φ2.76
5	92	Φ3.45




### Fold20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	990Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



#### LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	388	Φ2.43
2	97	Φ4.87
3	43	Φ7.31
4	24	Φ9.75
5	15	Φ12.19




**Out12-s**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>12W</b>	<b>&gt; 90</b> <b>&gt; 80</b>	<b>&lt; 3</b>	<b>3000K</b> <b>2700K</b> <b>4000K</b>	<b>Diffuse</b>	<b>1040Lm</b>

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 90Ra

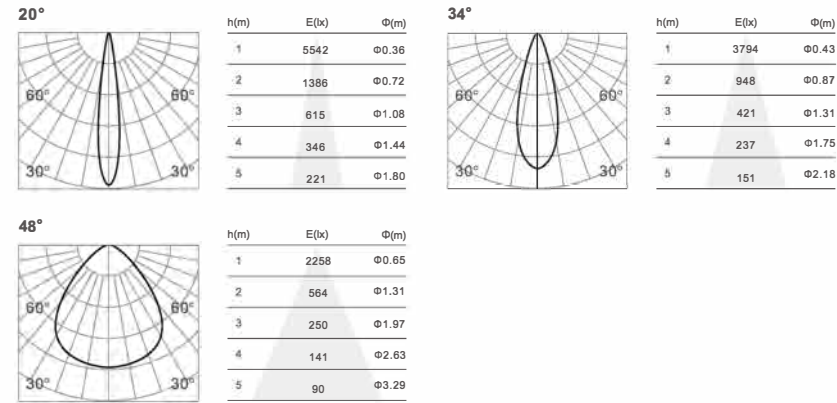


**Wallsher20-s**





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>12W</b>	<b>&gt; 90</b> <b>&gt; 80</b>	<b>&lt; 3</b>	<b>3000K</b> <b>2700K</b> <b>4000K</b>	<b>Diffuse</b>	<b>750Lm</b>

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 90Ra

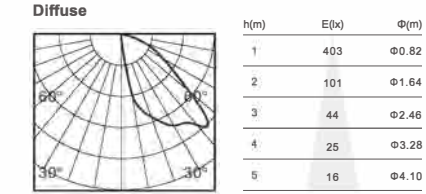


**Wallsher30-s**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>18W</b>	<b>&gt; 90</b> <b>&gt; 80</b>	<b>&lt; 3</b>	<b>3000K</b> <b>2700K</b> <b>4000K</b>	<b>Diffuse</b>	<b>1140Lm</b>

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 90Ra

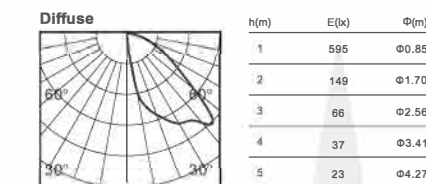

**Out40-s**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>15W</b>	<b>&gt; 90</b> <b>&gt; 80</b>	<b>&lt; 3</b>	<b>3000K</b> <b>2700K</b> <b>4000K</b>	<b>Diffuse</b>	<b>1015Lm</b>

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 90Ra

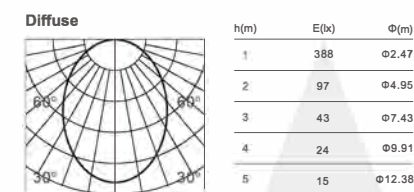



Pendant



Surface



Recessed

## CURVY MAGNETIC SYSTEM

With the brand new track addition  
The curvy system bring you more inspiration

Black White Golden Black bronze







### Curvy Full-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

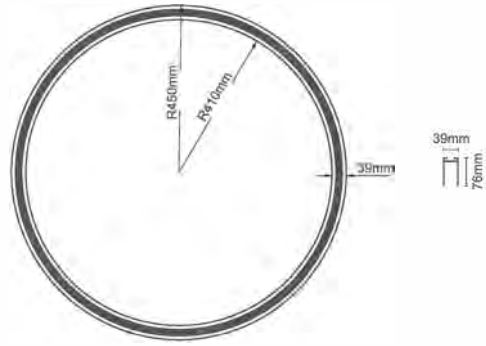



### Curvy 1/4-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

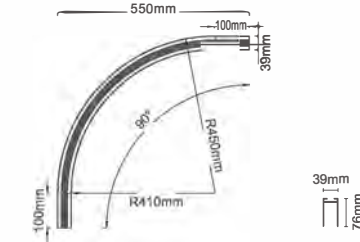



### Curvy 1/2-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

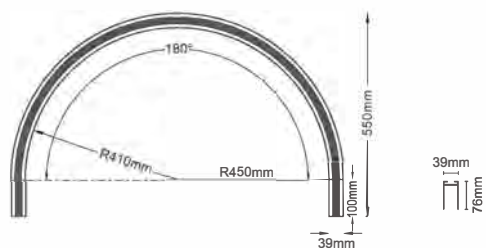



### Curvy 1/8-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

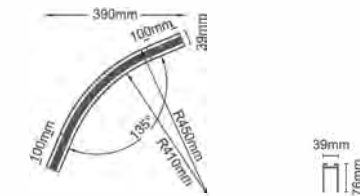





**Dot03-D9**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>4W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>12°</b>	<b>300Lm</b>
	<b>&gt; 80</b>		<b>2700K</b>	<b>34°</b>	
			<b>4000K</b>	<b>48°</b>	

■ Sandy Black □ Sandy White


**LIGHT DISTRIBUTION**  
3000K 90Ra



h(m)	E lx	Φ(m)
1	2963	∅0.16
2	740	∅0.33
3	329	∅0.55
4	185	∅0.66
5	118	∅0.83



h(m)	E lx	Φ(m)
1	895	∅0.56
2	223	∅1.13
3	99	∅1.70
4	55	∅2.27
5	35	∅2.84



h(m)	E lx	Φ(m)
1	938	∅0.58
2	234	∅1.17
3	104	∅1.76
4	58	∅2.35
5	37	∅2.94



**Dot06-D9**




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>8W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>12°</b>	<b>644Lm</b>
	<b>&gt; 80</b>		<b>2700K</b>	<b>34°</b>	
			<b>4000K</b>	<b>48°</b>	

■ Sandy Black □ Sandy White


**LIGHT DISTRIBUTION**  
3000K 90Ra



h(m)	E lx	Φ(m)
1	6645	∅0.17
2	1661	∅0.34
3	738	∅0.51
4	415	∅0.68
5	265	∅0.85



h(m)	E lx	Φ(m)
1	1947	∅0.55
2	486	∅1.11
3	216	∅1.67
4	121	∅2.22
5	77	∅2.78



h(m)	E lx	Φ(m)
1	1999	∅0.58
2	499	∅1.16
3	222	∅1.75
4	124	∅2.33
5	79	∅2.92





**Linear16-D9**



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
<b>7W</b>	<b>&gt; 90</b>	<b>&lt; 3</b>	<b>3000K</b>	<b>Diffuse</b>	<b>485Lm</b>
	<b>&gt; 80</b>		<b>2700K</b>		
			<b>4000K</b>		

■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**  
3000K 90Ra



h(m)	E lx	Φ(m)
1	182	∅2.56
2	45	∅5.12
3	20	∅7.68
4	11	∅10.24
5	7	∅12.80


**ACCESSORIES**


**Recessed kit-R**

■ Sandy Black □ Sandy White



Recessed kit for full curvy track





### Curvy Full-D10-s




Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White □ Golden ■ Black bronze

Surface  
Pendant  
Recessed

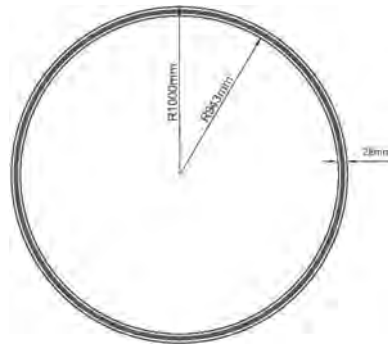

### Curvy 1/4-D10-s




Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White □ Golden ■ Black bronze

Surface  
Pendant  
Recessed



### Curvy 1/2-D10-s




Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White □ Golden ■ Black bronze

Surface  
Pendant  
Recessed



### Curvy 1/8-D10-s




Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White □ Golden ■ Black bronze

Surface  
Pendant  
Recessed








**Dot06-D10-s**



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	565Lm
	> 80		2700K		
			4000K		


■ Sandy Black    □ Sandy White

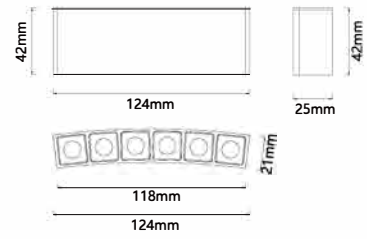

**LIGHT DISTRIBUTION**

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	2873	Φ0.33
2	718	Φ0.67
3	319	Φ1.01
4	179	Φ1.34
5	114	Φ1.68




**Linear12-D10-s**



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90	< 3	3000K	Diffuse	460Lm
	> 80		2700K		
			4000K		


■ Sandy Black    □ Sandy White

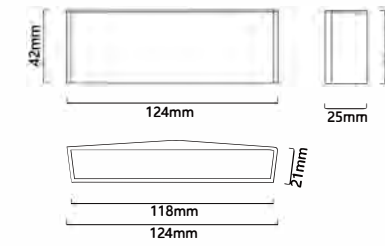

**LIGHT DISTRIBUTION**

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	176	Φ2.46
2	44	Φ4.91
3	19	Φ7.37
4	11	Φ9.83
5	7	Φ12.29

